

Product Specification

Electrical

Input Voltage:	100–240V 47/63Hz
Output Voltage:	200–240V
Rated Power:	37W (during operation), 1.8W (standby)

Operating Temperature Range: 0°C to +35°C

Enclosure Rating: Transformer IP67, Kelda hub IPX4

- › Requires 3Amp switched fused spur in dry zone
- › Fused spur to be connected back to 32A 30mA RCBO

Logistics

Net Weight:	13kg
Packed Weight:	15kg
Packed Dimensions:	(H)1145 x (W)394 x (D)224

Construction

Glass:	Low Iron Tempered Glass (6mm)
Panel Body:	SAE 304 Stainless Steel
Shower Head:	Chrome Plated ABS
Shower Faceplate:	ABS
Nozzles:	TPE

Operation

- › Panel Shower mounted behind wall
- › Kelda air powered Flex adjustable shower head
- › Requires hot and cold water supply
- › Inlet connections 15mm copper pipe or 1/2" BSP
- › Position of water connection from backside / top
- › Minimum advised working pressure 1 bar
- › Maximum advised working pressure 5 bar
- › TMV2 Thermostatic mixing valve included

Maintenance Schedule*

External Surfaces:	Daily/Weekly
Showerhead:	Quarterly
Internal Descale:	Bi-Annually

*Frequency should be adjusted inline with local water hardness and usage levels




Approved Materials



Where valve included

**2-Year
Warranty**

Product Dimensions

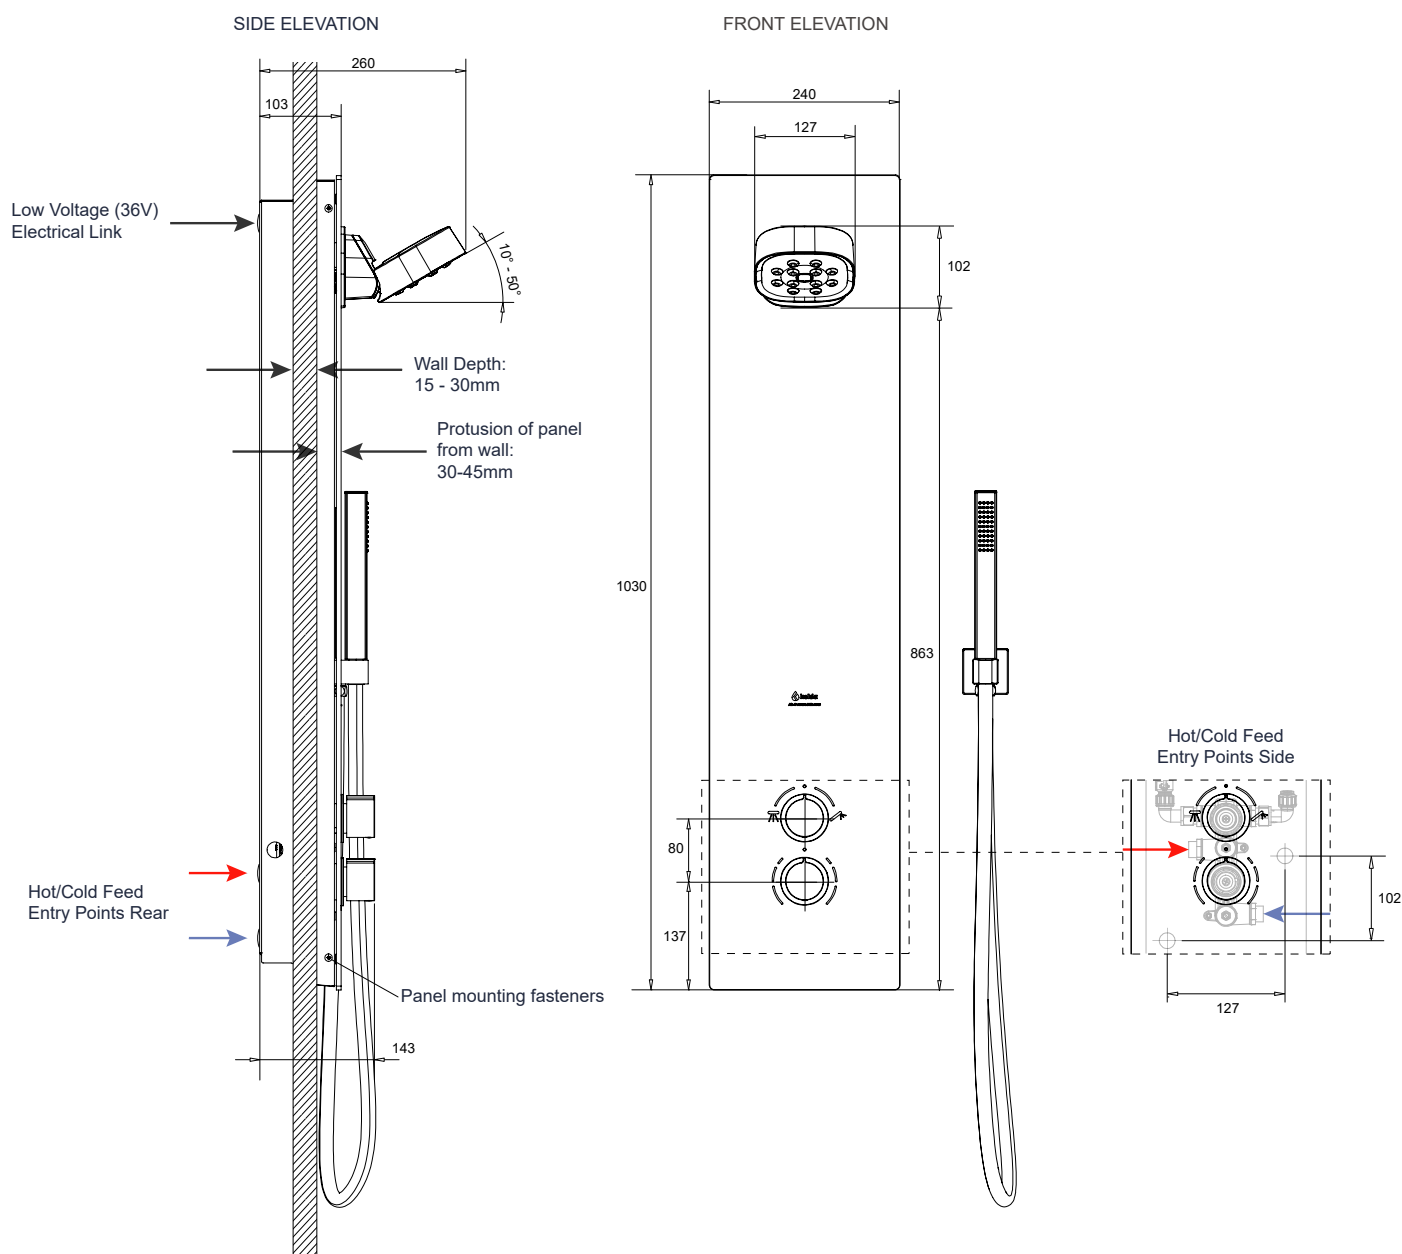

Product Dimensions (mm)

Length:	1030
Width:	240
Depth of Panel:	103
Depth to Head:	260

Installation* (mm)

Height to shower head:	2000
Min:	1800
Max:	1900

*Installation should be completed to suit the user's requirements

Flow Rates (SKU No.)

5lpm	93028105
6lpm	93028106