


Water saving products - 09/06/2025

Twyford
Geberit Group

Table of contents

Twyford Aspect rectangular bathtub with low water capacity, with legs, for heat exchanger	3
Twyford Mystic rectangular bathtub with low water capacity, with legs, for heat exchanger	4
Twyford Aspect rectangular bathtub with low water capacity, with feet	5
WC seat, fastening from above	6
Twyford Avalon exposed cistern, close-coupled	7
Twyford Sola concealed cistern 6 / 4 litres	8

Twyford Aspect rectangular bathtub with low water capacity, with legs, for heat exchanger

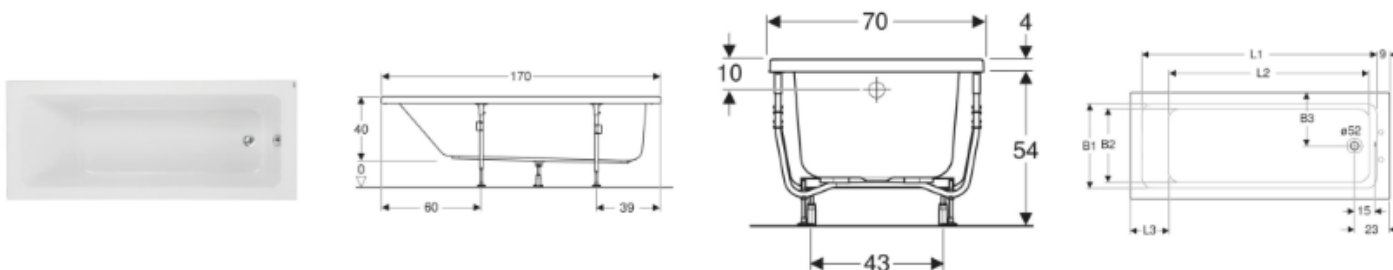

APPLICATION PURPOSES

- For private bathrooms and hotels
- For installation with bathtub feet or supports

CHARACTERISTICS

- Rectangular
- Outlet at foot
- Drain hole \varnothing 52 mm

TECHNICAL DATA

Product material Sanitary acrylic

SCOPE OF DELIVERY

- Set of feet for rectangular bathtub

TO ORDER ADDITIONALLY




- Bathtub panel
- Bathtub drain

ACCESSORIES

- Twyford front panel for rectangular bathtub
- Twyford end panel for rectangular bathtub
- Twyford Galerie front panel for rectangular bathtub
- Twyford Omnifit front panel for rectangular bathtub
- Twyford Galerie side panel for rectangular bathtub
- Twyford Omnifit end panel for rectangular bathtub
- Twyford Sola bathtub drain with waste plug, d52, length 46 cm, with ready-to-fit-set
- Twyford Sola bathtub drain with waste plug, d52, length 33.5 cm, with ready-to-fit-set

Art. no.	Colour / surface	L cm	L1 cm	L2 cm	L3 cm	L4 cm	B cm	B1 cm	B2 cm	B3 cm	H cm	Total water capacity l	With overflow hole
AP8512WH New	white / glossy	170	158	11.7	41.3	23	70	54	49	35	40	165	Yes

Twyford Mystic rectangular bathtub with low water capacity, with legs, for heat exchanger

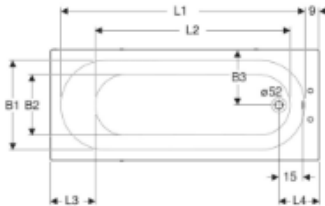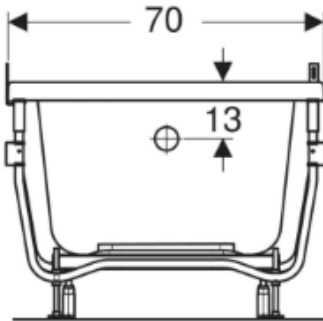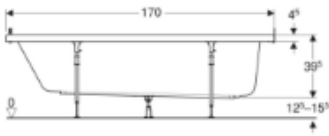

APPLICATION PURPOSES

- For private bathrooms and hotels
- For installation with bathtub feet or supports

CHARACTERISTICS

- Rectangular
- Outlet at foot
- Drain hole ø 52 mm

TECHNICAL DATA

Product material Sanitary acrylic

SCOPE OF DELIVERY

- Set of feet for rectangular bathtub

TO ORDER ADDITIONALLY

- Bathtub drain



- Bathtub panel

ACCESSORIES

- Twyford Sola bathtub drain with waste plug, d52, length 46 cm, with ready-to-fit-set
- Twyford Sola bathtub drain with waste plug, d52, length 33.5 cm, with ready-to-fit-set

Art. no.	Colour / surface	L cm	L1 cm	L2 cm	L3 cm	L4 cm	B cm	B1 cm	B2 cm	B3 cm	H cm	Number of tap holes	Total water capacity l	With overflow hole
BP9012WH New	white / glossy	170	155	120	28	25.5	70	57	50.8	35	39.5	2	140	Yes

Twyford Aspect rectangular bathtub with low water capacity, with feet

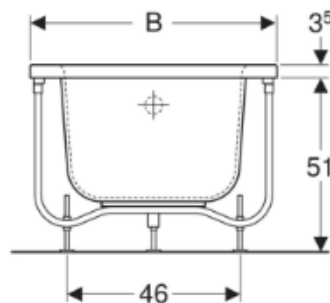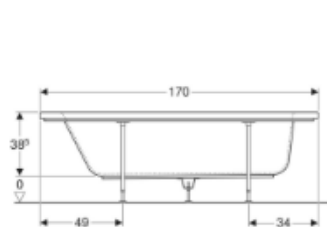

APPLICATION PURPOSES

- For private bathrooms and hotels
- For installation with bathtub feet or supports

CHARACTERISTICS

- Rectangular

- Outlet at foot
- Drain hole \varnothing 52 mm

TECHNICAL DATA

Product material

Sanitary acrylic

SCOPE OF DELIVERY

- Set of feet for rectangular bathtub

TO ORDER ADDITIONALLY


- Bathtub panel

Art. no.	Colour / surface	L cm	L1 cm	B cm	B1 cm	H cm	Total water capacity l	With overflow hole
AP8100WH	white	170	152	70	54	38.5	156	Yes

WC seat, fastening from above



Example image

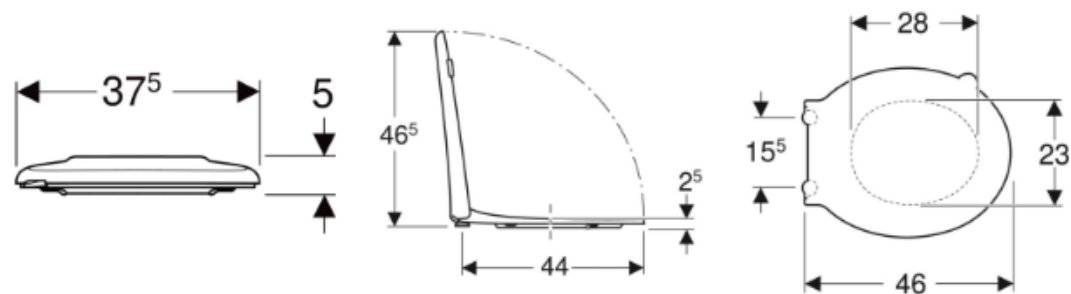

CHARACTERISTICS

- Overlapping WC lid

TECHNICAL DATA

Product material

Duroplast

Fastening distance


15.5 cm

Art. no.	Colour / surface	B cm	H cm	T cm	Soft-closing mechanism	Fastening	Hinge material
AV7875BE	stahlblau	37.5	5	46	no	from above	Stainless steel
AV7875GY	mausgrau	37.5	5	46	no	from above	Stainless steel
AV7875WH	signalweiss	37.5	5	46	no	from above	Stainless steel

Twyford Avalon exposed cistern, close-coupled



Example image

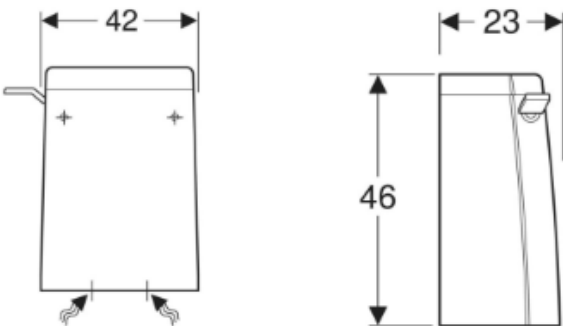

APPLICATION PURPOSES

- For close-coupled installation

CHARACTERISTICS

- Type 2 in accordance with EN 997

- Water supply connection on the bottom

TECHNICAL DATA

Flush volume, factory setting
Product material

6 / 4 l
Vitreous china

SCOPE OF DELIVERY


- Exposed cistern, close-coupled

TO ORDER ADDITIONALLY

- Fastening material for rear wall

Art. no.	Colour / surface	B cm	H cm	T cm
AV2661WH	white	42	46	23
AV2668WH	white	42	46	23

Twyford Sola concealed cistern 6 / 4 litres

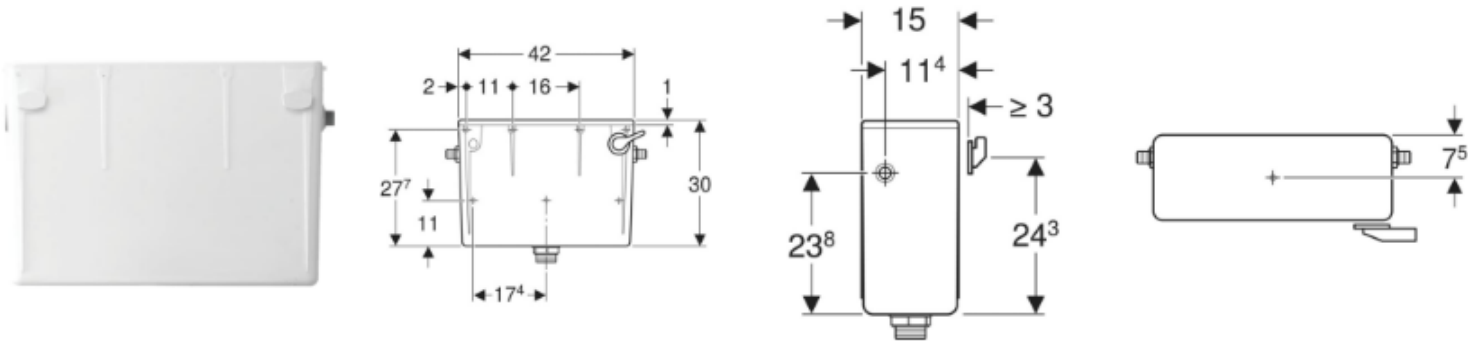

APPLICATION PURPOSES

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs

CHARACTERISTICS

- Concealed cistern with premounted lever for pneumatic flush actuation

- Water supply connection 1/2"

TECHNICAL DATA

Flow pressure	0.1–10 bar
Operating temperature, water max.	23 °C
Flush volume, factory setting	6 / 4 l
Product material	Plastic

SCOPE OF DELIVERY

- Concealed cistern
- Fastening material

TO ORDER ADDITIONALLY

- WC ceramic appliance
- WC seat

Art. no.	Colour / surface	B cm	H cm	T cm
CX9564XX	white / chrome-plated	42	30	15

Twyford Bathrooms C/O Geberit Sales Ltd

Geberit House, Edgehill Drive
Warwick, CV34 6NH
Great Britain

enquiries@geberit.co.uk

+44 1926 400 101

+44 1926 516 800

<https://www.twyfordbathrooms.com>